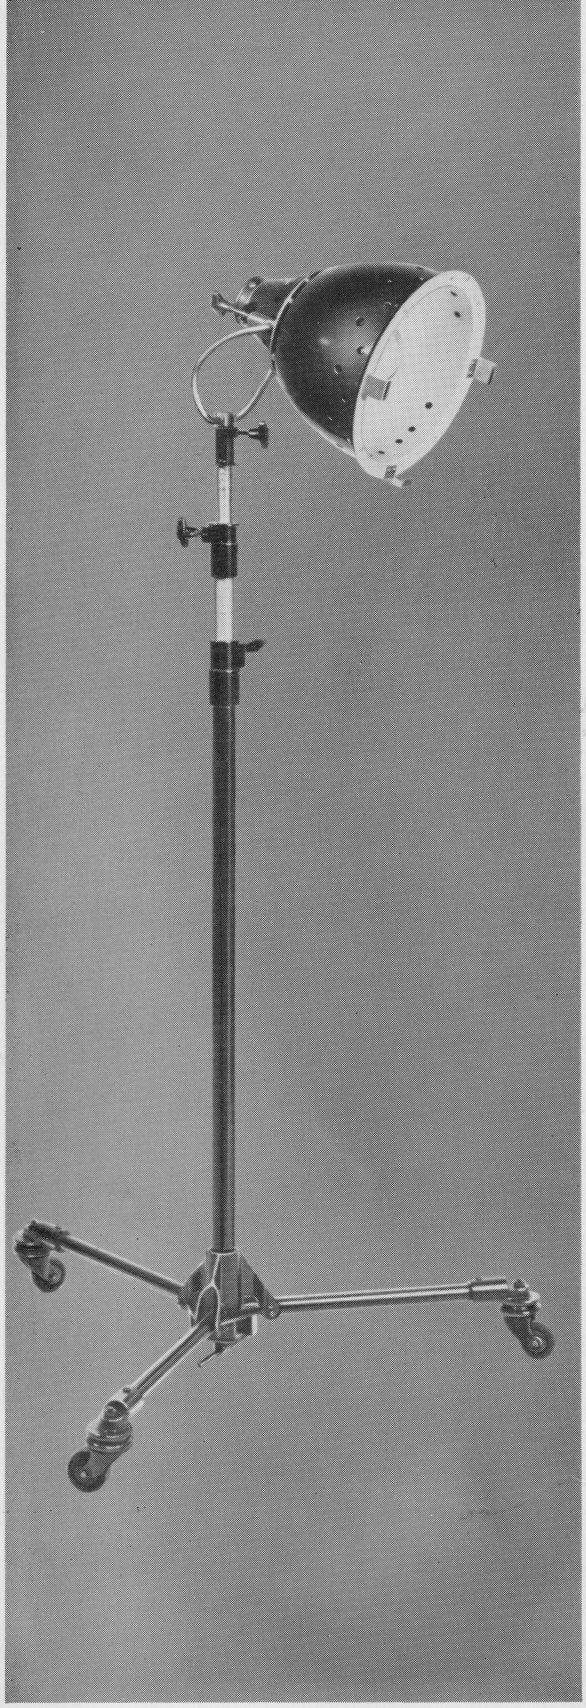

'BASHER' M-R Type 2

'Basher' M-R Type 2

Low-power flood giving wide field of soft light at constant intensity. Widely used by fashion and commercial photographers for general and background lighting.

SPECIFICATION

LAMPHEAD M-R Type 2

CONSTRUCTION	Double skin sheet metal housing.
MOUNTING	Special 'U'-shaped yoke of steel tubing with $\frac{5}{8}$ inch diameter spud.
REFLECTOR	Aluminium, painted matt white.
SWITCH	Quick make and break toggle type line switch.
CABLE	25 feet of 3-core rubber covered attached to lamphead.
SOCKET	Edison Screw.
BULB TYPE AND RATING	(not included in price of lamp). Photopearl or Photoflood. 250 watt. 100/250 volt. Lamp Ref. PP/1. 500 watt. 100/250 volt. Lamp Ref. PP/2. 500 watt. 100/250 volt. Lamp Ref. Photopearl.

STAND M-R Type S500

(not included in price of lamp).

Double lift, Folding type.

CONSTRUCTION	Steel tubing, non-ferrous metal fittings with 2 inch rubber-tyred castors.
SOCKET DIAMETER	$\frac{5}{8}$ inch.

MOLE-RICHARDSON